



嵌入式地脚灯/壁灯
Recessed LED Stair Light and Wall Light



产品简介Product Introduction


- 1.面盖:ACD12#压铸铝，粉体烤漆
- 2.灯体:ACD12#压铸铝，粉体烤漆
- 3.驱动:恒压输入
- 4.玻璃:高强度钢化玻璃，抗冲击耐摩擦
- 5.配件:预埋盒ABS

- 1.Front cover : 12# Die-casting aluminum T=20-25um, Adhesion of ISO class I/ASTM class 4B high temperature painting
- 2.Housing: 12# Die-casting aluminum .T=20-25um Adhesion of ISO class I/ASTM class 4B high temperature painting
- 3.Driver: Constant current output,Constant current output
- 4.Glass: Step tempered glass

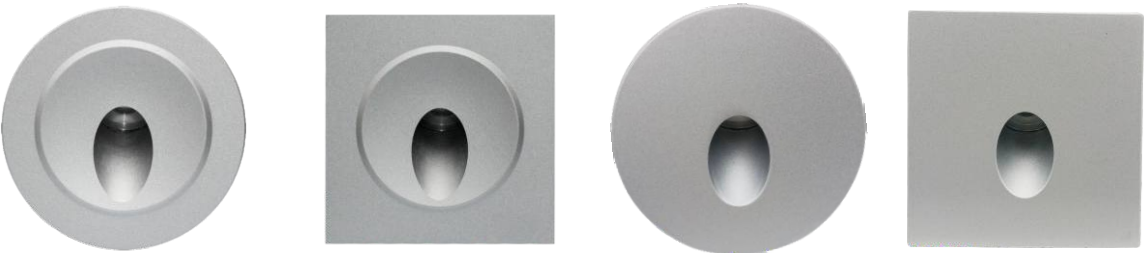

WB1078R5 π α-A3-Y WB1078R5 π α-A3-Y WB1078R5*α-A3-Y WB1078R5*α-A3-Y

Dimensions

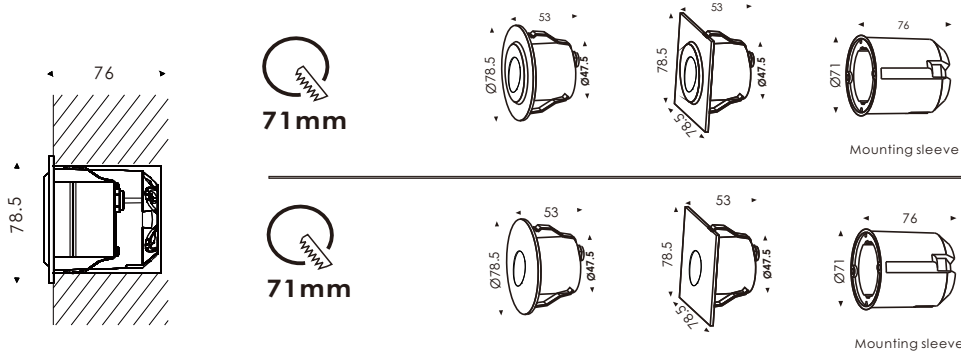

Product specifications					
Item No.	WB1078R5 π α-A3-Y	WB1078S5 π α-A3-Y	Item No.	WB1078R5*α-A3-Y	WB1078S5*α-A3-Y
LED source	CREE XPE		LED source	CREE XPE	
Beam angle	80°		Beam angle	80°	
LED color	2200K/2700K/3000K/4000K/5000K/6000K		LED color	2200K/2700K/3000K/4000K/5000K/6000K	
Power	2W		Power	2W	
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²		Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	
Operating temperature	-20℃~40℃		Operating temperature	-20℃~40℃	
IK rate	04		IK rate	04	
Luminance(lm)	Warm white=68lm/ Cool white=76lm		Luminance(lm)	Warm white=68lm/ Cool white=76lm	
Dimmable support	Triac/PWM/0-10V/DALI/DMX512		Dimmable support	Triac/PWM/0-10V/DALI/DMX512	

