



嵌入式地脚灯/壁灯
Recessed LED Stair Light and Wall Light





WB1120S5*α-C7-Y




WB1160S5*α-C7-Y

Dimensions

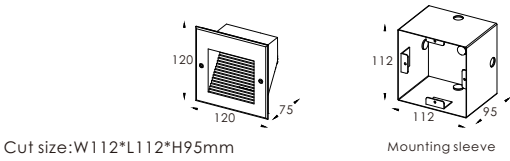

Cut size:W112*L112*H95mm

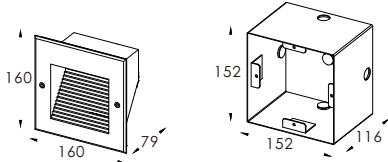

Cut size:W152*L152*H116mm

Mounting sleeve

Product specifications

Item No.	WB1120S5*α-C7-Y	Item No.	WB1160S5*α-C7-Y
LED source	OSRAM	LED source	OSRAM
Beam angle	120°	Beam angle	120°
LED color	2700K/3000K/4000K/5000K/6000K	LED color	2700K/3000K/4000K/5000K/6000K
Power	1.2W	Power	2.5W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm ² AC100~240V H05RN-F-3*0.75mm ²	Input voltage	DC12V/DC24V H05RN-F-2*1.0mm ² AC100~240V H05RN-F-3*0.75mm ²
Operating temperature	-20℃~40℃	Operating temperature	-20℃~40℃
IK rate	03	IK rate	02
Luminance(lm)	Warm white=50lm/ Cool white=64lm	Luminance(lm)	Warm white=60lm/ Cool white=80lm
Dimmable support	-	Dimmable support	-



产品简介Product Introduction

- 面盖:ACD12#压铸铝, 粉体烤漆
- 灯体:ACD12#压铸铝, 粉体烤漆
- 驱动:恒压输入
- 玻璃:高强度钢化玻璃, 抗冲击耐摩擦
- 配件:预埋盒ABS

- Front cover : 12# Die-casting aluminum T=20-25um, Adhesion of ISO class 1/ASTM class 4B high temperature painting
- Housing: 12# Die-casting aluminum T=20-25um Adhesion of ISO class 1/ASTM class 4B high temperature painting
- Driver: Constant current output,Constant current output
- Glass: Step tempered glass
- Accessories: Mounting sleeve ABS

Front cover color option

