



产品简介Product Introduction

- 1.面盖:316L 不锈钢

2.灯体 :316不锈钢

3.驱动:恒压输入

4.玻璃:高强度钢化玻璃，抗冲击耐摩擦

5.配件:预埋盒ABS
- 1.Front cover : Stainless steel SUS316I

2.Housing: 12# Die-casting grey powder coated aluminum .T=60-80μm Adhesion of ISO class 1/ASTM class 4B high temperature painting

3.Driver: Constant current output,Constant current output

4.Glass: Step tempered glass


5.Accessories: Mounting sleeve ABS

嵌入式地脚灯/壁灯
Recessed LED Stair Light and Wall Light



WB1063L2 β α-C7-Y-0.195MWB1063L2 β α-C7-Y-0.328M

Dimensions

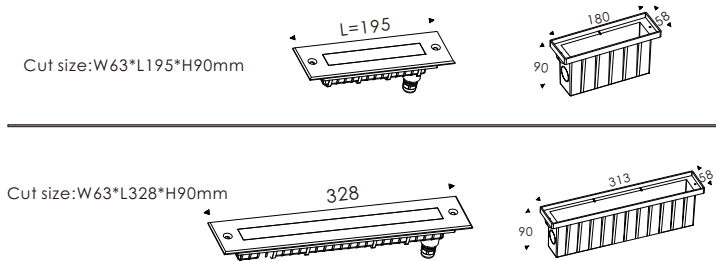

Product specifications			
Item No.	WB1063L2 β α-C7-Y-0.195M	Item No.	WB1063L2 β α-C7-Y-0.328M
LED source	OSRAM SMD	LED source	OSRAM SMD
Beam angle	120°	Beam angle	120°
LED color	2700K/3000K/4000K/5000K/6000K	LED color	2700K/3000K/4000K/5000K/6000K
Power	2.6W	Power	5.2W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²
Operating temperature	-20℃~40℃	Operating temperature	-20℃~40℃
IK rate	09	IK rate	09
Luminance(lm)	Warm white=54m/ Cool white=60lm	Luminance(lm)	Warm white=86lm/ Cool white=92lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512	Dimmable support	Triac/PWM/0-10V/DALI/DMX512

