



Stainless steel bracket
& angle adjustable



WB5063L2A-A3-T-0.328



Adjustable angle 1





Adjustable angle 2



Adjustable angle 3

Dimensions

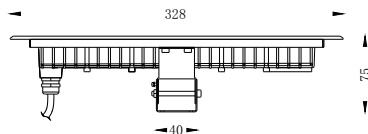

产品简介Product Introduction

- 1.面盖:316L 不锈钢
- 2.灯体:316不锈钢
- 3.驱动:恒压输入
- 4.玻璃:高强度钢化玻璃, 抗冲击耐摩擦
- 5.支架:316不锈钢

- 1.Front cover: Stainless steel SUS 316L#
- 2.Body: Stainless steel SUS 316#
- 3.Driver:Constant current output,Constant current output
- 4.Glass:Step tempered glass
- 5.Bracket:Stainless steel SUS316#



WARNING:Must be installed under the water to prevent the light from being burnt off because of over-heating.

Product specifications

Item No.	WB5063L2A-A5-Y-0.328
LED source	CREE
Beam angle	25°/45°/60°
LED color	2200K/2700K/3000K/4000K/5000K/6000K
Power	6*2W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm ²
Operating temperature	-20℃~40℃
IK rate	08
Luminance(lm)	Warm white= lm/ Cool white=lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512