




产品简介Product Introduction

- 1.面盖: 316L 不锈钢
- 2.灯体: 316不锈钢
- 3.驱动: 恒压输入
- 4.玻璃: 高强度钢化玻璃, 抗冲击耐摩擦
- 5.配件: 预埋盒ABS

- 1.Front cover : 12# Die-casting aluminum T=20-25um, Adhesion of ISO class 1/ASTM class 4B high temperature painting
- 2.Housing: 12# Die-casting aluminum .T=20-25µm Adhesion of ISO class 1/ASTM class 4B high temperature painting
- 3.Driver: Constant current output,Constant current output
- 4.Glass: Step tempered glass
- 5.Accessories: Mounting sleeve ABS


- 1.Front cover : Stainless steel SUS316l
- 2.Housing: 12# Die-casting grey powder coated aluminum .T=60-80µm Adhesion of ISO class 1/ASTM class 4B high temperature painting
- 3.Driver: Constant current output,Constant current output
- 4.Glass: Step tempered glass

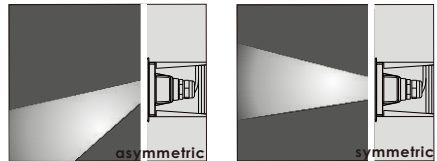

线性地脚灯/条形壁灯
Recessed LED Linear Wall Light



Dimensions

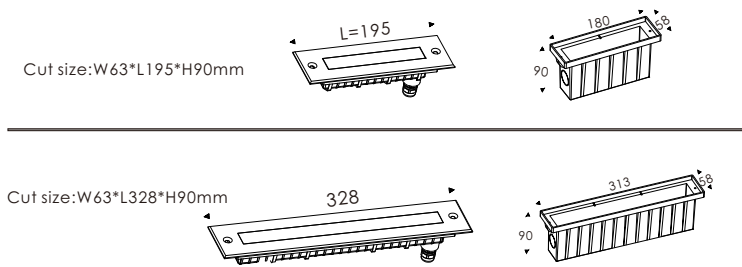

Product specifications			
Item No.	WB1063L2 β α-A3-Y-0.195M	Item No.	WB1063L2 β α-A3-Y-0.328M
LED source	CREE XPE	LED source	CREE XPE
Beam angle	35 45°,30°,40°,60°	Beam angle	35 45°,30°,40°,60°
LED color	2200K/2700K/3000K/4000K/5000K/6000K	LED color	2200K/2700K/3000K/4000K/5000K/6000K
Power	6.8W	Power	12.8W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²
Operating temperature	-20℃~40℃	Operating temperature	-20℃~40℃
IK rate	09	IK rate	09
Luminance(lm)	Warm white=400lm/ Cool white=285lm	Luminance(lm)	Warm white=578lm/ Cool white=875lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512	Dimmable support	Triac/PWM/0-10V/DALI/DMX512

