



产品简介Product Introduction

- 1.面盖:316L 不锈钢
- 2.灯体:316不锈钢
- 3.驱动:恒压输入
- 4.玻璃:高强度钢化玻璃，抗冲击耐摩擦
- 5.支架:316不锈钢

- 1.Front cover: Stainless steel SUS 316L#
- 2.Body: Stainless steel SUS 316#
- 3.Driver:Constant current output,Constant current output
- 4.Glass:Step tempered glass
- 5.Bracket:Stainless steel SUS316#




LED水下投光灯
Led Underwater Spot Light



WB5153R1*α-A3-T-06



WB5153R1*α-A3-T-09

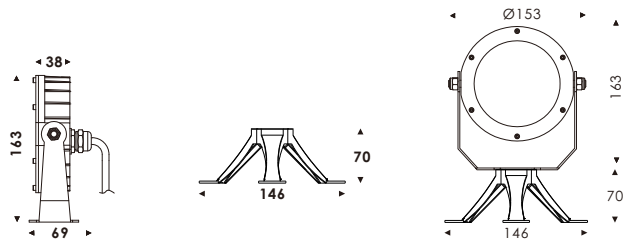

Product specifications			
Item No.	WB5153R1*α-A3-T-06	Item No.	WB5153R1*α-A3-T-09
LED source	CREE	LED source	CREE
Beam angle	10°/20°/30°/40°/60°	Beam angle	25°/45°/60°
LED color	2200K/2700K/3000K/4000K/5000K/6000K	LED color	2700K/3000K/4000K/5000K/6000K
Power	6*2W	Power	9*1.5W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm²	Input voltage	DC12V/DC24V H07RN-F-2*1.0mm²
Operating temperature	-20℃~40℃	Operating temperature	-20℃~40℃
IK rate	08	IK rate	08
Luminance(lm)	Warm white= lm/ Cool white=lm	Luminance(lm)	Warm white= lm/ Cool white= lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512	Dimmable support	Triac/PWM/0-10V/DALI/DMX512

WARNING:Must be installed under the water to prevent the light from being burnt off because of over-heating