



嵌入式水下埋地灯

Recessed LED Underwater Light



WB4118R1*α-A3-Y

Dimensions

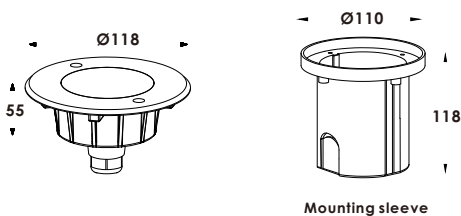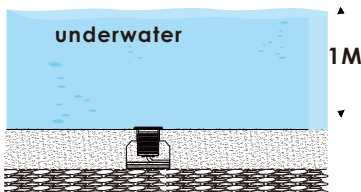

产品简介Product Introduction

- 1.面盖:316L 不锈钢
- 2.灯体:316不锈钢
- 3.驱动:恒压输入
- 4.玻璃:8M高强度钢化玻璃, 抗冲击耐摩擦
- 5.配件:预埋盒ABS

- 1.Front cover: Stainless steel SUS 316L#
- 2.Body: Stainless steel SUS 316#
- 3.Driver:Constant current output,Constant current output
- 4.Glass:Step tempered glass
- 5.Mounting sleeve:ABS



WARNING:Must be installed under the water to prevent the light from being burnt off because of over-heating.

Product specifications			
Item No.	WB4118R1*α-A3-Y	Item No.	WB4118R1*α-A5-Y
LED source	CREE	LED source	CREE
Beam angle	10°/20°/30°/40°/60°	Beam angle	Asymmetric 45°
LED color	2200K/2700K/3000K/4000K/5000K/6000K	LED color	2200K/2700K/3000K/4000K/5000K/6000K
Power	3*2W	Power	3*2W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm²	Input voltage	DC12V/DC24V H07RN-F-2*1.0mm²
Operating temperature	-20°C~40°C	Operating temperature	-20°C~40°C
IK rate	08	IK rate	08
Luminance(lm)	Warm white=492 lm/ Cool white=lm	Luminance(lm)	Warm white=481lm/ Cool white= lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512	Dimmable support	Triac/PWM/0-10V/DALI/DMX512