



产品简介Product Introduction

- 1.面盖:316 不锈钢
- 2.灯体:12# 压铸铝，表面喷涂处理
- 3.驱动:恒压输入
- 4.玻璃:高强度钢化玻璃，抗冲击耐摩擦
- 5.配件:预埋盒 ABS

- 1.Front cover :Stainless steel SUS316#
- 2.Housing:12# Die-casting grey powder coated aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B high temperature painting
- 3.Driver:Constant current output,Constant current output
- 4.Glass:Step tempered glass
- 5.Mounting sleeve:ABS

嵌入式埋地灯
Recessed Inground light




WB2070R1*α-B3-Y



WB2070S1*α-B3-Y

Dimensions

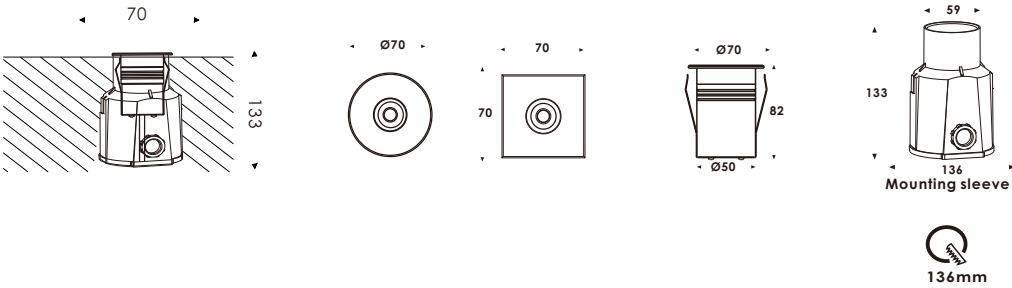

Product specifications			
Item No.	WB2070R1*α-B3-Y	Item No.	WB2070S1*α-B3-Y
LED source	CREE COB	LED source	CREE COB
Beam angle	24°/36°/60°	Beam angle	24°/36°/60°
LED color	2700K/3000K/4000K/5000K/6000K	LED color	2700K/3000K/4000K/5000K/6000K
Power	1*6W	Power	1*6W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²
Operating temperature	-20℃~40℃	Operating temperature	-20℃~40℃
IK rate	09	IK rate	09
Luminance(lm)	Warm white=320lm/ Cool white=360lm	Luminance(lm)	Warm white=320lm/ Cool white=360lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512 (internal)	Dimmable support	Triac/PWM/0-10V/DALI/DMX512 (internal)

