




Product Introduction

- 1.Front cover : 12# Die-casting grey powder coated aluminum .T=60-80μm Adhesion of ISO class 1/ASTM class 4B high temperature painting
- 2.Housing: 12# Die-casting grey powder coated aluminum .T=60-80μm Adhesion of ISO class 1/ASTM class 4B high temperature painting
- 3.Driver: Constant current output,Constant current output
- 4.Glass: Step tempered glass
- 5.Mounting sleeve: ABS

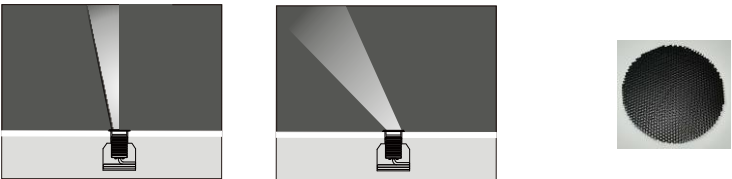


嵌入式侧出光埋地灯
Recessed Inground Side-light



WB2055R5*α-A3-Y

WB2070R5*α-B3-Y

Dimensions

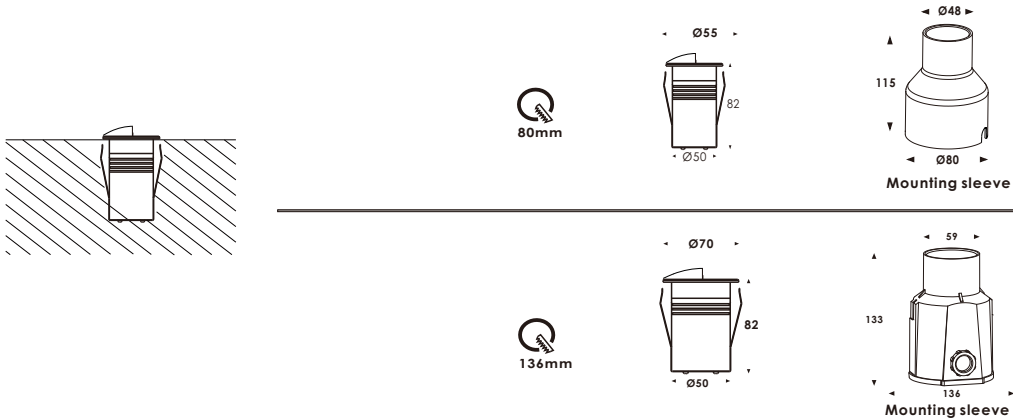

Product specifications			
Item No.	WB2055R5*α-A3-Y	Item No.	WB2070R5*α-B3-Y
LED source	CREE	LED source	CREE
Beam angle	10°/25°/40°/60°	Beam angle	24°/40°/60°
LED color	2200K/2700K/3000K/4000K/5000K/6000K	LED color	2700K/3000K/4000K/5000K/6000K
Power	1*2W	Power	1*5W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²
Operating temperature	-20℃~40℃	Operating temperature	-20℃~40℃
IK rate	08	IK rate	08
Luminance(lm)	Warm white= lm/ Cool white= lm	Luminance(lm)	Warm white= lm/ Cool white= lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512 (internal)	Dimmable support	Triac/PWM/0-10V/DALI/DMX512 (internal)