

嵌入式埋地灯

Recessed Inground Light




WB2055R1*α-A3-Y



WB2055R4*α-A7-Y

Dimensions

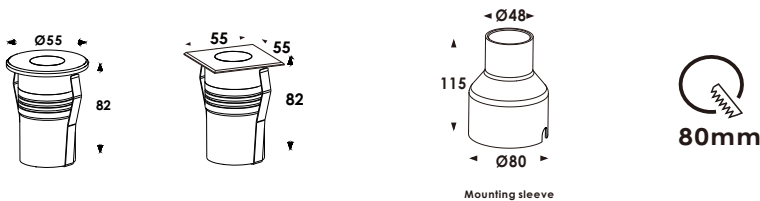

产品简介Product Introduction

- 1.面盖:316 不锈钢
- 2.灯体:12# 压铸铝, 表面喷涂处理
- 3.驱动:恒压输入
- 4.玻璃:高强度钢化玻璃, 抗冲击耐摩擦
- 5.配件:预埋盒 ABS

- 1.Front cover :Stainless steel SUS316#
- 2.Housing:12# Die-casting grey powder coated aluminum.T=60-80µm Adhesion of ISO class 1/ASTM class 4B high temperature painting
- 3.Driver:Constant current output,Constant current output
- 4.Glass:Step tempered glass
- 5.Mounting sleeve:ABS



Product specifications			
Item No.	WB2055R1*α-A3-Y/WB2055S1*α-A3-Y	Full color	WB2055R4*α-A7-Y/WB2055S4*α-A7-Y
LED source	CREE	OSRAM	CREE
Beam angle	10°/15°/30°/40°/60°	30°/40°/60°	120° surface lighting
LED color	2200K/2700K/3000K/4000K/5000K/6000K	RGB 3IN1/RGBW	2200K/2700K/3000K/4000K/5000K/6000K
Power	1*2W	3W	1*1.5W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	DC24V (internal)	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²
Operating temperature	-20℃~40℃	-20 ~40	-20℃~40℃
IK rate	08	08	08
Luminance(lm)	Warm white=140lm/ Cool white=152lm	-	Warm white=28lm/ Cool white=32lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512 (internal)	DMX512 (internal)	Triac/PWM/0-10V/DALI/DMX512 (internal)