


大功率LED线条灯
High Power LED Linear Inground light




WB2063L2βa-A5-Y-0.195M

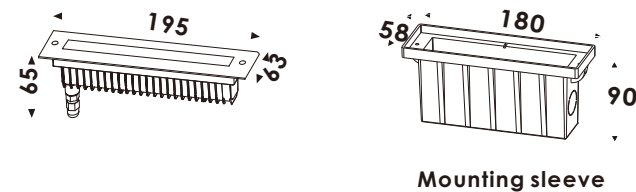

Mounting sleeve



WB2063L2βa-A5-Y-0.328M

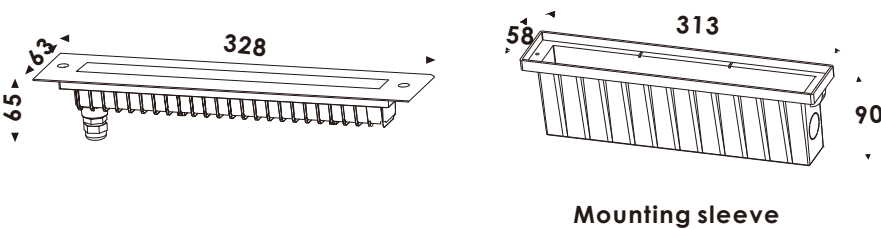

Mounting sleeve

产品简介Product Introduction

- 1.拥有自主知识产权外观设计,具有优秀的防眩光性能,优秀的偏光洗墙效果。
 - 2.灯具采用一体式散热结构,保证LED的有充足的散热,使灯具达到长时间的使用寿命。
 - 3.面盖采用316L不锈钢镀钛工艺,灯体采用环保ACD12#高强度压铸铝,表面高端美国老虎粉体烤漆喷涂处理,以确保海边等高酸碱环境的使用。
 - 4.玻璃采用8MM超白高强度钢化玻璃,保证灯具光输出的超高效率达90I以上和色温的准确性以及极强的抗冲击承重能力。
 - 5.LED采用国际一线品牌美国CREE,超高亮度输出,光色一致性好,显色指数大于80I以上(可选90I以上)。
 - 6.驱动模块采用国际一线品牌或元器件,保证灯具稳定与故障的低概率。
 - 7.灯具支持DMX512,1-10V,DALI,TRIAC,PWM调光控制,调光平顺柔和。
 - 8.配件:预埋件采用高强度环保ABS。
- 1.The products are self - developed with independent intellectual property rights and internal anti glare.
- 2.Adopt integrated body design, could be fully heat dissipation and fully ensure the stability and long lifespan of led.
- 3.Front ring of luminaire made of Tetanizing 316L stainless steel while lamp housing made of environmental and high tensile ACD12# die-casting aluminum, and the surface of lamp housing is with American Tiger Powder Paint Treatment, suitable for high-acid and alkali environments use.
- 4.Ultra clear and highly strengthen 8mm tempered glass cover, ensure high luminous efficacy (90-95%) , outstanding accuracy of color temperature, and excellent impact resistance and rub resistance.
- 5.Uses CREE LED with super brightness, high CRI 80+ (even 90+ is available) and Uniformity of light Color as its light source.
- 6.Top quality driver, components and excellent circuit design ensures the product with stable quality and low failure rate.
- 7.Optional DMX512, 0/1-10V, DALI, TRIAC, PWM dimming function.
- 8.Accessory: high-impact durable ABS mounting sleeve.

Product specifications			
Item No.	WB2063L2βa-A5-Y-0.195M	Item No.	WB2063L2βa-A5-Y-0.328M
LED source	CREE	LED source	CREE
Beam angle	20°/30°/40°/60°/35 45°	Beam angle	20°/30°/40°/60°/35 45°
LED color	2200K/2700K/3000K/4000K/5000K/6000K	LED color	2200K/2700K/3000K/4000K/5000K/6000K
Power	3*2W	Power	6*2W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	Input voltage	DC12V/DC24V H07RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²
Operating temperature	-20℃~40℃	Operating temperature	-20℃~40℃
IK rate	08	IK rate	08
Luminance(lm)	Warm white=110lm/ Cool white=126lm	Luminance(lm)	Warm white=22lm/ Cool white=28lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512	Dimmable support	Triac/PWM/0-10V/DALI/DMX512

