




嵌入式大功率埋地灯
Recessed Inground light



WB2186R1*α-A3-Y

Dimensions

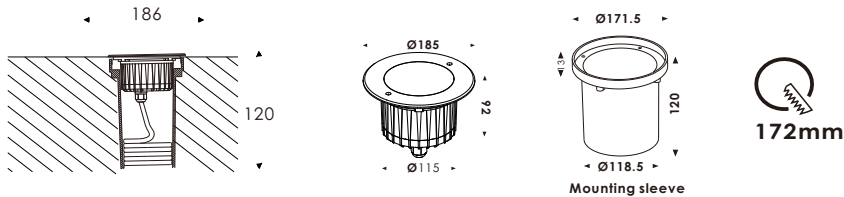

Product specifications			
Item No.	WB2186R1*α-A3-Y	Full color	WB2186R1*α-A5-Y
LED source	CREE	OSRAM	CREE
Beam angle	10°/25°/40°/60°	30°/40°/60°	35 45°
LED color	2000K/2700K/3000K/4000K/5000K/6000K	RGB 3IN1/RGBW	2000K/2700K/3000K/4000K/5000K/6000K
Power	12*2W	18W/24W	12*2W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	DC24V (internal)	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²
Operating temperature	-20℃~40℃	-20 ~40	-20℃~40℃
IK rate	10	10	10
Luminance(lm)	Warm white= lm/ Cool white= lm	-	Warm white= lm/ Cool white= lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512 (internal)	DMX512 (internal)	Triac/PWM/0-10V/DALI/DMX512 (internal)



Product Introduce

- 1.Front cover : Stainless steel SUS316
- 2.Housing: 12# Die-casting grey powder coated aluminum .T=60-80μm Adhesion of ISO class 1/ASTM class 4B high temperature painting
- 3.Driver: Constant current output,Constant current output
- 4.Glass: Step tempered glass
- 5.Mounting sleeve: ABS

