



可外调角大功率埋地灯
Beam Angle Adjustable High Power LED Inground Light



WB2095R1*α-A1-Y

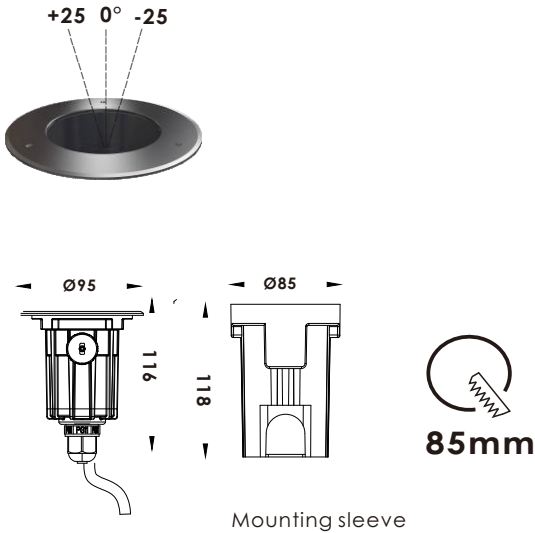

WB2130R1*α-A1-Y

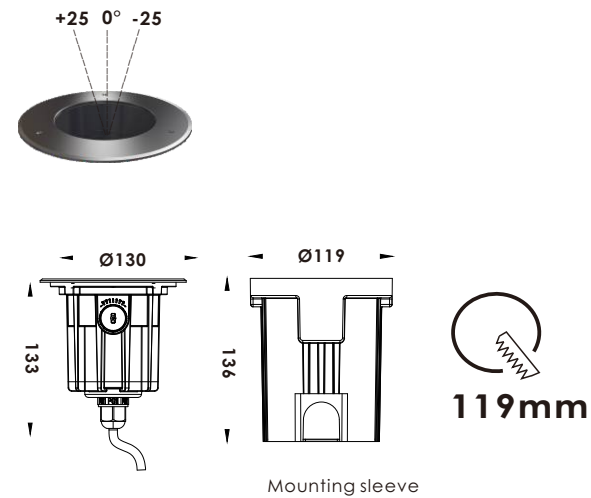

产品简介Product Introduction

- 1.拥有自主知识产权外观设计,实用新型专利,优雅时尚美观,极具工业设计风。
- 2.灯具外部实现正负25度出光方向调节,采用独特球形散热结构,保证LED的有充足的散热,使灯具达到长时间的使用寿命。
- 3.面盖采用316L不锈钢镀钛工艺,灯体采用环保ACD12#高强度压铸铝,表面高端美国老虎粉体烤漆喷涂处理,以确保海边等高酸碱环境的使用。
- 4.玻璃采用8MM超白高强度钢化玻璃,保证灯具光输出的超高效率达90以上和色温的准确性以及极强的抗冲击承重能力。
- 5.LED采用国际一线品牌美国CREE,超高亮度输出,光色一致性好,显色指数大于80以上(可选90以上)。
- 6.驱动模块采用国际一线品牌或元器件,保证灯具稳定与故障的低概率。
- 7.灯具支持DMX512,1-10V,DALI,TRIAC,PWM调光控制,调光滑顺柔和。
- 8.配件:预埋件采用高强度环保ABS。

- 1.The products are self - developed with independent intellectual property rights and utility model patents.
- 2.The beam direction of luminaire can be 25° adjustable by external knob of the luminaire. Unique spherical heat dissipation structure design enables the luminaire with excellent heat dissipation and helps prolong lifespan of the product..

- 3.Front ring of luminaire made of Tetanizing 316L stainless steel while lamp housing made of environmental and high tensile ACD12# die-casting aluminum, and the surface of lamp housing is with American Tiger Powder Paint Treatment, suitable for high-acid and alkali environments use.
- 4.Ultra clear and highly strengthen 8mm tempered glass cover, ensure high luminous efficacy (90-95%) , outstanding accuracy of color temperature, and excellent impact resistance and rub resistance.
- 5.Uses CREE LED with super brightness, high CRI 80+ (even 90+ is available) and Uniformity of light Color as its light source.
- 6.Top quality driver, components and excellent circuit design ensures the product with stable quality and low failure rate.
- 7.Optional DMX512, 0/1-10V, DALI, TRIAC, PWM dimming function.
- 8.Accessory: high-impact durable ABS mounting sleeve.

Product specifications			
Item No.	WB2095R1*α-A1-Y	Item No.	WB2130R1*α-A1-Y
LED source	CREE	LED source	CREE
Beam angle	10°/20°30°/40°/60°	Beam angle	10°/20°/30°/40°/60°
LED color	2200K/2700K/3000K/4000K/5000K/6000K	LED color	2200K/2700K/3000K/4000K/5000K/6000K
Power	1*2W	Power	3*2W
Input voltage	DC12V/DC24V H05RN-F-2*1.0mm² AC100~240V H05RN-F-3*0.75mm²	Input voltage	DC12V/DC24V H07RN-F-2*1.0mm² AC100~240V H05RN-F-3*1.0mm²
Operating temperature	-20℃~40℃	Operating temperature	-20 ~40℃
IK rate	05	IK rate	08
Luminance(lm)	Warm white=110lm/ Cool white=126lm	Luminance(lm)	Warm white=22lm/ Cool white=28lm
Dimmable support	Triac/PWM/0-10V/DALI/DMX512 (internal)	Dimmable support	Triac/PWM/0-10V/DALI/DMX512 (internal)

