




## Dimensions

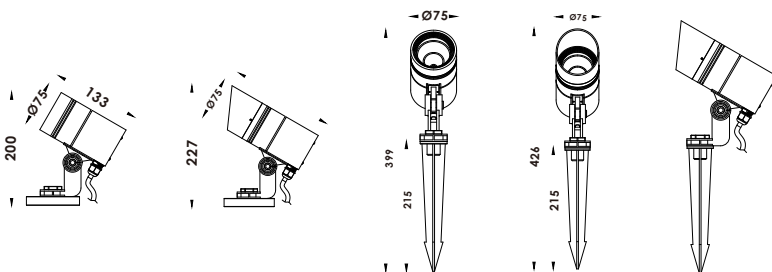

## 产品简介Product Introduction

- 1.Front cover & Housing:12# Die-casting grey powder coated aluminum.T=60-80um Adhesion of ISO class 1/ASTM class 4B high temperature painting  
2.Driver:Constant current output,Constant current output  
3.Glass:Step tempered glass  
4.Base:aluminum  
Spike:ABS



|                       |                                                                 |                   |  |
|-----------------------|-----------------------------------------------------------------|-------------------|--|
| Item No.              | WB3075R1*α-B4-B/WB3075R3*α-B4-B/WB3075R1*α-B4-M/WB3075R3*α-B4-M |                   |  |
| LED source            | CREE                                                            |                   |  |
| Beam angle            | 25°/36°/60°                                                     |                   |  |
| LED color             | 2700K/3000K/4000K/5000K/6000K                                   |                   |  |
| Power                 | 1*13W                                                           |                   |  |
| Input voltage         | DC 12V/DC24V                                                    | H05RN-F-2*1.0mm²  |  |
|                       | AC100~240V                                                      | H05RN-F-3*0.75mm² |  |
| Operating temperature | -20℃~40℃                                                        |                   |  |
| IK rate               | 03                                                              |                   |  |
| Luminance(lm)         | Warm white=   m/ Cool white=   lm                               |                   |  |
| Dimmable support      | Triac/PWM/0-10V/DALI/DMX512                                     |                   |  |